BLAUPUNKT

5DG66550
Wall flue, 60 cm
Stainless steel and glass

Output, consumption
• Voltage: 220 – 240 V
• Total connected load: 220 W
• Energy efficiency class: A*
• Average power consumption: 44 kWh/year*
• Fan efficiency class: A*
• Light efficiency class: A*
• Grease filter efficiency class: C*
• Noise min./max. Normal level: 49/61 dB*
• Fan output max. Normal level / Intensive level*:
in extraction mode max. 380 m3/h / 610 m3/h
in circulation mode max. 290 m3/h / Intensive 360 m3/h
* According to EU Regulation No. 65/2014 / Fan capacity according to EN 6159

Equipment / comfort
• Stainless steel and glass
• For wall installation above cooking zones
• Optional extraction or circulation mode (starter set required for circulation mode)
• Electronic control
• 4-level fan power (3 power levels + 1 intensive level), controllable via short-stroke keys with LED display
• Intensive levels with automatic reset
•Powerful and quiet blower
• Uniform, bright lighting with 2 × 1.5 W LED lamps
• Illuminance: 110 lux
• Colour temperature: 3.500 K
• Metal grease filter, dishwasher-safe
• Including exhaust air shaft

Optional accessories:
• 5Z51DXU0X0: Starter set for circulation mode

Technical data and dimensions
• Appliance dimensions, extraction: 635 – 965 × 900 × 525 mm
•Appliance dimensions, circulation: 635 – 1075 × 900 × 525 mm
• Length of connection cable (cm): 130

Optional accessories:
• 5Z51DXU0X0: Starter set for circulation mode

Available color options:

Accessories:

Features:
• Color of the fireplace: stainless steel
• Type: fireplace
• Length of connection cable (cm): 130
• Height of the fireplace: 576-906 / 576-998
• Height of the unit without chimney (mm): 59
• Control: electronically
• Max. Fan power exhaust air operation (m3 / h): 380
• Blower power at intensive stage recirculation mode: 350
• Max. Fan-circulating air operation (m3 / h): 280
• Blower power at intensive stage exhaust air operation (m³ / h): 600
• Number of lamps (pcs): 2
• Sound power (dB (A) re 1 pW): 62
• Diameter of exhaust air outlet (mm): 120/150
• Material of grease filter: aluminum
• Odor filter: no
• Type of air duct: convertible
• Optional accessories: 5Z51DXA0X0, 5Z51DXU0X0
• Type of lamps: LED
• Type of grease filter: cassette

Consumption and connection values:
• Connected load (W): 220
• Hedging (A): 10
• Voltage (V): 220-240
• Frequency (Hz): 50; 60
• Plug type: Schuko / Gardy.m. grounding
• Type of installation: wall mounting
• Housing material: stainless steel, glass
• Plug type: Schuko / Gardy.m. grounding
• Location of the blower: Engine in the chimney
• Backflow flap: no
• Length of connection cable (cm): 130
• Dimensions of the device (mm): 635-1075 x 600 x 525
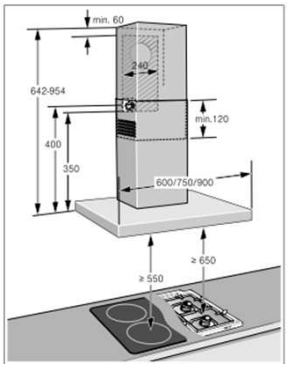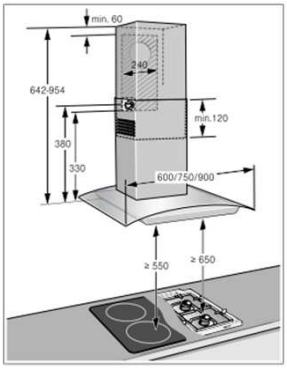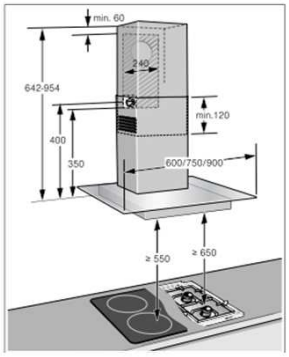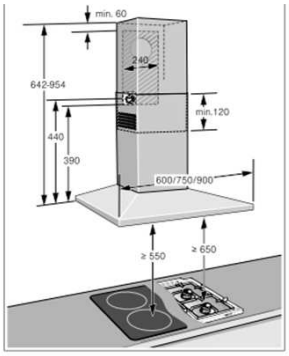
EAN-Nr.: 4251003102147