BLAUPUNKT

Wall flue

5DL69654

EG1838

Additional accessories available

Chimney extension

5Z 9117X3

EG18887

Activated carbon filter

5Z 9100X1

EG18881

Long-life activated carbon filter

5Z 9100X2

EG18884

Chimney extension

5Z 9117X4

EG18888

Stainless steel metallic grease filter

5Z 9100X3

EG18885

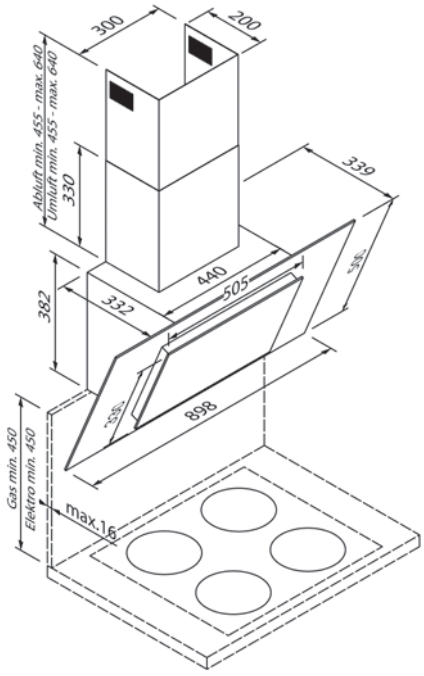

Design	
Colour	Black glass / Dark Steel
Construction type	Angled hood
Width (in cm)	90

Operating modes & power	
Extraction mode / circulation mode	• / •
Fan efficiency class	A
Light efficiency class	A
Grease filter efficiency class	C
Extraction capacity max. normal / intensive level[1]	630 / 790 m^3 / h
Circulation capacity max. normal / intensive level[1]	385 / 430 m^3 / h

Operating comfort & equipment	
Operation	Touch Control
Lighting	2 × 2,7 W LED
Power levels	3 + 1 Intensive level
Intensive levels with automatic reset	•
Multi Control[1]	•
Filter saturation indicator	•

Accessories included**	
Accessories included	Metal grease filter, dishwasher-safe, Chimney

Technical data	
Energy efficiency class	A+
Connected load	276 W / 220 – 240 V
Fuse protection (in A)	10 A
Frequency (in Hz)	50;60 Hz
Plug type	Type F
Length of connection cable (in cm)	120 cm
Net weight (in KG)	14,4 kg
Gross weight (in KG)	22,4 kg
Dimensions of the packaged appliance (H × W × D)	63,7 × 102,0 × 65,0 cm
Appliance dimensions, extraction (H × W × D)	71,2 – 102,2 × 90,0 × 34,0 cm
Appliance dimensions, circulation (H × W × D)	83,7 – 102,2 × 90,0 × 34,0 cm
EAN	4251003106893

Note	
Note	

[1] Normen für Lüfterleistung nach EN 61591.
[2] Normen für Schalldruck nach EN 60704-2-13.
[3] Weitere Informationen zu Multi Control finden Sie auf unserer Webseite: www.blaupunkt-einbaugeraete.com
EEK-Skala von A+++ bis D.

Further information can be found on our website:
www.blaupunkt-einbaugeraete.com