




| |
|---|
| <p>Wall hood 51S69760 - 102G90 BK</p> |
| <p>Power / Consumption</p> <ul style="list-style-type: none"> Annual Efficiency Consumption: 232*2*361+1000=167.50kwh Total connected load: 232W±20% Voltage: 220-230V Sound power (dB(A) re 1 pW): 68 dB <p>Equipment / Comfort</p> <ul style="list-style-type: none"> Delay Shut off modes: Yes Level fan output: 3 power control: touch control Filter alarm: light: 1 x 2 W LED Cone size filter with 2 layers <p>Power:</p> <ul style="list-style-type: none"> Power - exhaust air operation (m3/h): 837±50 Power intensive exhaust air operation (m3/h) :1094±50 Power-circulating air operation (m3/h): Power in intensive air recirculation mode (m7/h): <p>Technical data and dimensions (HxWxD)</p> <ul style="list-style-type: none"> Extraction: 160mm Circulation: 380x330x445mm Device dimensions (packed): 955*665*525mm Net weight (kg): 17.0 Gross weight (kg): 20.6 Chimney height (mm): 525 Height of the unit without chimney (mm): 85 |

| |
|---|
| <p>Accessories:</p>  |
| <p>Special accessories:</p> |
| <p>Available color options:</p> <p>SS or BK</p> |

| |
|---|
| <p>Features:</p> <ul style="list-style-type: none"> Hood type: Wall hood Chimneys Colour: black powder coating hood with S/S panel Approval certificates: Yes Length of connection cable (cm): 150 Height of the chimney (mm): 525 Height of the hood without chimney (mm): 85 Number of lamps (pcs): 1 Outlet diameter (mm): 160mm Grease filter material: S/S Required accessories: Flue pipe/Screws Special accessories: Type of lamps: Round shape Lamp power (W): 1*2W Grease filter type: Cone size filter with 2 layers |
| <p>Consumption and connection values:</p> <ul style="list-style-type: none"> Connected load (W): 232W±20% Fuse rating (A): F5A L250V Voltage (V): 220-230 Frequency (Hz): 50 Plug type: Indian 3-pin round plug Housing material: S/S, glass Approval certificates: Required distance between hob and hood Electric hob: 650-700mm Gas hob: 650-700mm Position of the fan: motor in the casing |

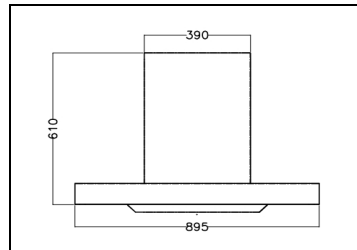

1150200089

90CM. S/S不锈钢面板配黑色钢化玻璃

风量：850m³/h

28#全封铜线电机

铁风轮

不锈钢油杯

开关： 3速体感开关(新方案，抗雷击5000V/20S)

LED灯

一截不锈钢围板

1.8米铝箔烟管(160mm直径)，配175转160转换器

小南非插头配BIS插头(2019标准)

带电热清洗